



General description

- Exhaust steel air valve
- Adjustable inner core
- 50 mm deep galvanized steel mounting frame
- Standard available colour : White RAL9010 (Matt) and RAL 9016 (Shiny)
- Available diameters : 80-250 mm

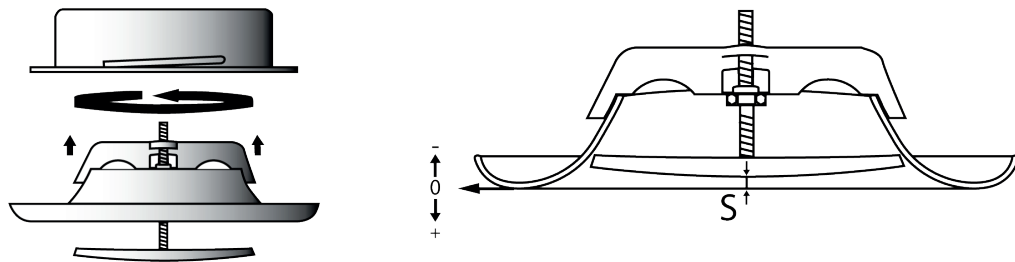

Technical specification

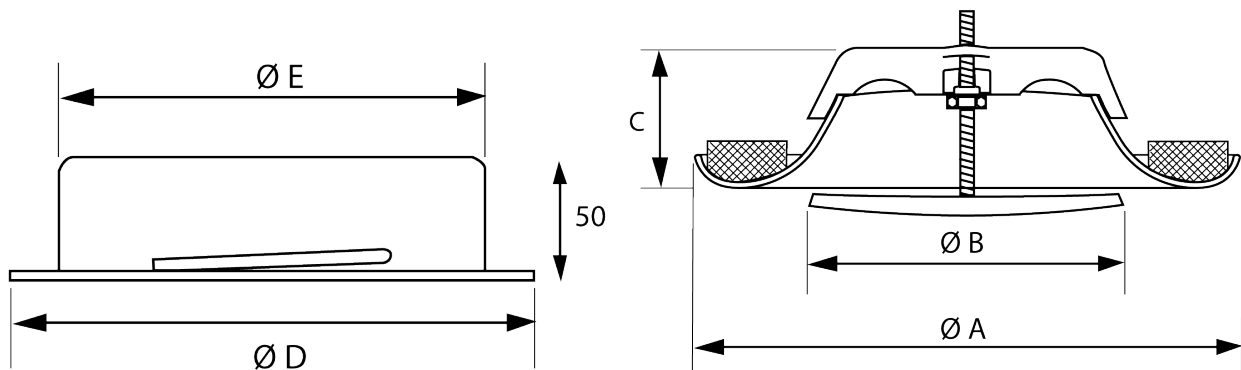

	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
E-SVF 80	116	60	38	105	79
E-SVF 100	140	76	38	125	99
E-SVF 125	166	100	45	150	124
E-SVF 150	203	120	50	175	149
E-SVF 160	210	130	50	186	159
E-SVF 200	250	160	56	225	199
E-SVF 250	305	215	75	275	248

Tolerance : +/- 3 mm except Dia E: Tolerance: +/- 1 mm

Information contained herein is based on careful tests and experience. It reflects our knowledge and is for guidance purpose only. It is given in good faith and user should ensure that the product is fit for purpose before any application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. Manufacturer and distributor are not responsible for any non-recommended use or consequential damage.

Sound attenuation and airflow characteristics according to «S» opening

Diameters	Airflow (m3/h)	Airflow (l/s)	Opening «S» (mm)	Delta Pt (Pa)	dBA
DIA 80 MM	40	11	3	35	22
			0	80	31
	60	17	9	40	30
			6	55	32
			3	100	38
DIA 100 MM	80	22.2	8	35	25
			6	55	30
			4	85	34
	100	27.8	10	58	33
			8	72	36
	120	33.3	10	68	36
DIA 125 MM	100	27.8	6	35	23
			3	50	26
			0	90	34
	140	39	15	28	25
			12	34	27
			9	45	28
			6	65	33
	180	50	3	100	36
			15	45	32
			12	50	33
			9	70	35
DIA 160 MM	160	41	10	25	20
			5	42	23
			2	70	30
			0	90	35
	200	56	10	40	24
			5	68	30
			2	95	35
	250	69	15	38	26
			10	59	30
5			95	36	
20			25	25	
DIA 200 MM	300	83	15	35	27
			12	50	30
			9	68	32
			6	100	35
			20	35	30
	350	97	15	55	33
			12	70	35
			20	50	34
	400	111	15	65	36

Information contained herein is based on careful tests and experience. It reflects our knowledge and is for guidance purpose only. It is given in good faith and user should ensure that the product is fit for purpose before any application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. Manufacturer and distributor are not responsible for any non-recommended use or consequential damage.